


Tool Specification

1. Part Number: YRS-620
2. Terminal: SPHD-002T-P0.5
3. Application

Crimp Position	AWG UL1007	Tensile Strength N (kgf)	Strip Length mm
28	AWG 28	15(1.5) min.	2.0
26-24	AWG 26	20(2.0) min.	2.0
26-24	(AWG 24)	(30(3.1) min.)	2.0

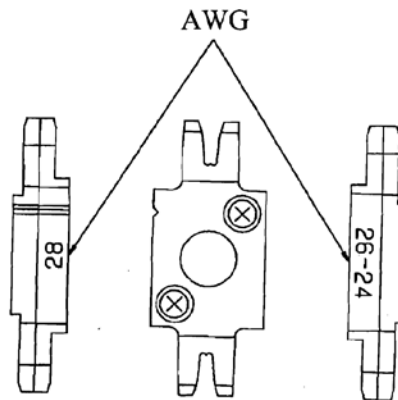

PART NUMBER	DESCRIPTION
YRS 7014-0161 CRIPMER ASSY	UPPER CRIPMER ASSEMBLY
YRS 7014-1211 ANVIL A	CONDUCTOR ANVIL
YRS 7014-0374 ANVIL B	INSULATION ANVIL
YRS 7014-0010 SHEAR BLADE	SHEAR BLADE

- Check the crimp appearance and tensile strength prior to use.
- Select the appropriate crimp position based on the wire size that will be used.
- The wire size in () above could cause excessive crimping. Check the tensile strength and crimp appearance to confirm an acceptable crimp.
- The insulation barrel is set for the type of wire listed and is not adjustable.