

HiPerFET™ Power MOSFETs


ISOPLUS247™

IXFR 26N50
IXFR 24N50

V_{DSS}	I_{D25}	$R_{DS(on)}$
500 V	24 A	0.20 Ω
500 V	22 A	0.23 Ω

(Electrically Isolated Back Surface)


N-Channel Enhancement Mode
High dV/dt , Low t_{rr} , HDMOS™ Family



$t_{rr} \leq 250$ ns

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	$T_J = 25^\circ\text{C}$ to 150°C	500	V
V_{DGR}	$T_J = 25^\circ\text{C}$ to 150°C ; $R_{GS} = 1$ M Ω	500	V
V_{GS}	Continuous	± 20	V
V_{GSM}	Transient	± 30	V
I_{D25}	$T_C = 25^\circ\text{C}$	26N50	26 A
		24N50	24 A
I_{DM}	$T_C = 25^\circ\text{C}$, Pulse width limited by T_{JM}	26N50	104 A
		24N50	96 A
I_{AR}	$T_C = 25^\circ\text{C}$	26N50	26 A
		24N50	24 A
E_{AR}	$T_C = 25^\circ\text{C}$	30	mJ
dv/dt	$I_S \leq I_{DM}$, $di/dt \leq 100$ A/ μs , $V_{DD} \leq V_{DSS}$ $T_J \leq 150^\circ\text{C}$, $R_G = 2$ Ω	5	V/ns
P_D	$T_C = 25^\circ\text{C}$	250	W
T_J		-55 ... +150	$^\circ\text{C}$
T_{JM}		150	$^\circ\text{C}$
T_{stg}		-55 ... +150	$^\circ\text{C}$
T_L	1.6 mm (0.062 in.) from case for 10 s	300	$^\circ\text{C}$
V_{ISOL}	50/60 Hz, RMS $t = 1$ minute leads-to-tab	2500	V~
Weight		6	g

ISOPLUS 247™



G = Gate D = Drain
S = Source

* Patent pending

Features

- Silicon chip on Direct-Copper-Bond substrate
- High power dissipation
- Isolated mounting surface
- -2500V electrical isolation
- Low drain to tab capacitance (<50pF)
- Low $R_{DS(on)}$ HDMOS™ process
- Rugged polysilicon gate cell structure
- Unclamped Inductive Switching (UIS) rated
- Fast intrinsic Rectifier

Applications


- DC-DC converters
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- AC motor control

Advantages

- Easy assembly
- Space savings
- High power density

Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
V_{DSS}	$V_{GS} = 0$ V, $I_D = 250$ μA	500		V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 4$ mA	2		V
I_{GSS}	$V_{GS} = \pm 20$ V _{DC} , $V_{DS} = 0$			± 100 nA
I_{DSS}	$V_{DS} = 0.8 \cdot V_{DSS}$ $V_{GS} = 0$ V	$T_J = 25^\circ\text{C}$		200 μA
		$T_J = 125^\circ\text{C}$		1 mA
$R_{DS(on)}$	$V_{GS} = 10$ V, $I_D = I_T$ Notes 1 & 2	26N50		0.20 Ω
		24N50		0.23 Ω

Symbol	Test Conditions	Characteristic Values			
		(T _J = 25°C, unless otherwise specified)			
		min.	typ.	max.	
g_{fs}	V _{DS} = 15 V; I _D = I _T Note 1	11	21	S	
C_{iss}	V _{GS} = 0 V, V _{DS} = 25 V, f = 1 MHz		4200	pF	
C_{oss}			450	pF	
C_{rss}			135	pF	
t_{d(on)}	V _{GS} = 10 V, V _{DS} = 0.5 • V _{DSS} , I _D = I _T R _G = 1 Ω (External),		16	25	ns
t_r			33	45	ns
t_{d(off)}			65	80	ns
t_f			30	40	ns
Q_{g(on)}	V _{GS} = 10 V, V _{DS} = 0.5 • V _{DSS} , I _D = I _T		135	160	nC
Q_{gs}			28	40	nC
Q_{gd}			62	85	nC
R_{thJC}				0.50	K/W
R_{thCK}			0.15		K/W

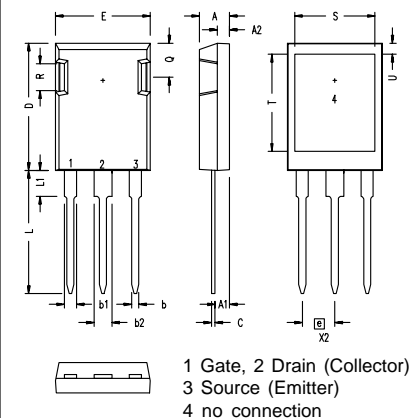ISOPLUS 247 (IXFR) OUTLINE


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.83	5.21	.190	.205
A ₁	2.29	2.54	.090	.100
A ₂	1.91	2.16	.075	.085
b	1.14	1.40	.045	.055
b ₁	1.91	2.13	.075	.084
b ₂	2.92	3.12	.115	.123
C	0.61	0.80	.024	.031
D	20.80	21.34	.819	.840
E	15.75	16.13	.620	.635
e	5.45 BSC		.215 BSC	
L	19.81	20.32	.780	.800
L1	3.81	4.32	.150	.170
Q	5.59	6.20	.220	.244
R	4.32	4.83	.170	.190
S	13.21	13.72	.520	.540
T	15.75	16.26	.620	.640
U	1.65	3.03	.065	.080

Symbol	Test Conditions	Characteristic Values				
		(T _J = 25°C, unless otherwise specified)				
		min.	typ.	max.		
I_S	V _{GS} = 0 V			26	A	
I_{SM}	Repetitive; pulse width limited by T _{JM}			104	A	
V_{SD}	I _F = I _S , V _{GS} = 0 V, Note 1			1.5	V	
t_{rr}	I _F = I _S , -di/dt = 100 A/μs, V _R = 100 V			250	ns	
Q_{RM}		T _J = 25°C			400	ns
		T _J = 125°C			1	1.5
I_{RM}		T _J = 25°C			10	A
	T _J = 125°C			15	A	

- Note: 1. Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 %
2. I_T test current: IXFR26N50 I_T = 13A
IXFR24N50 I_T = 12A
3. See IXFR26N50 data sheet for characteristic curves.



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.