

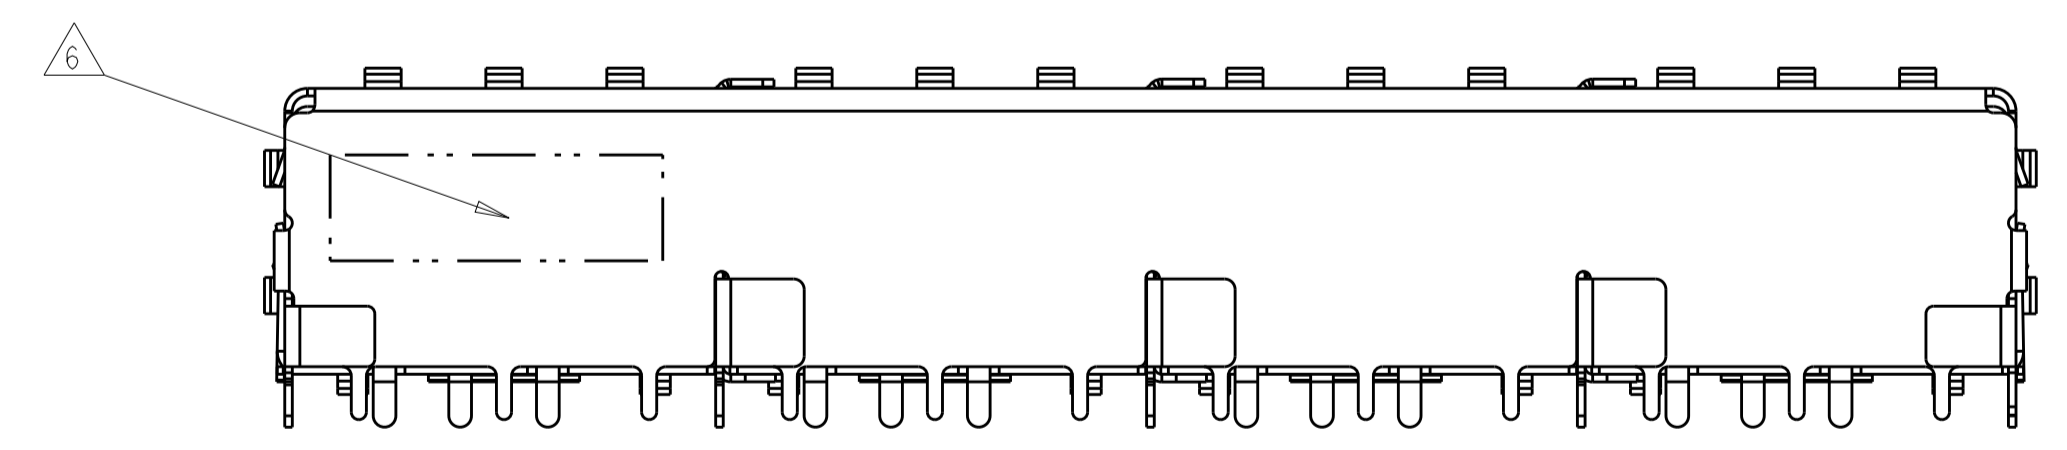
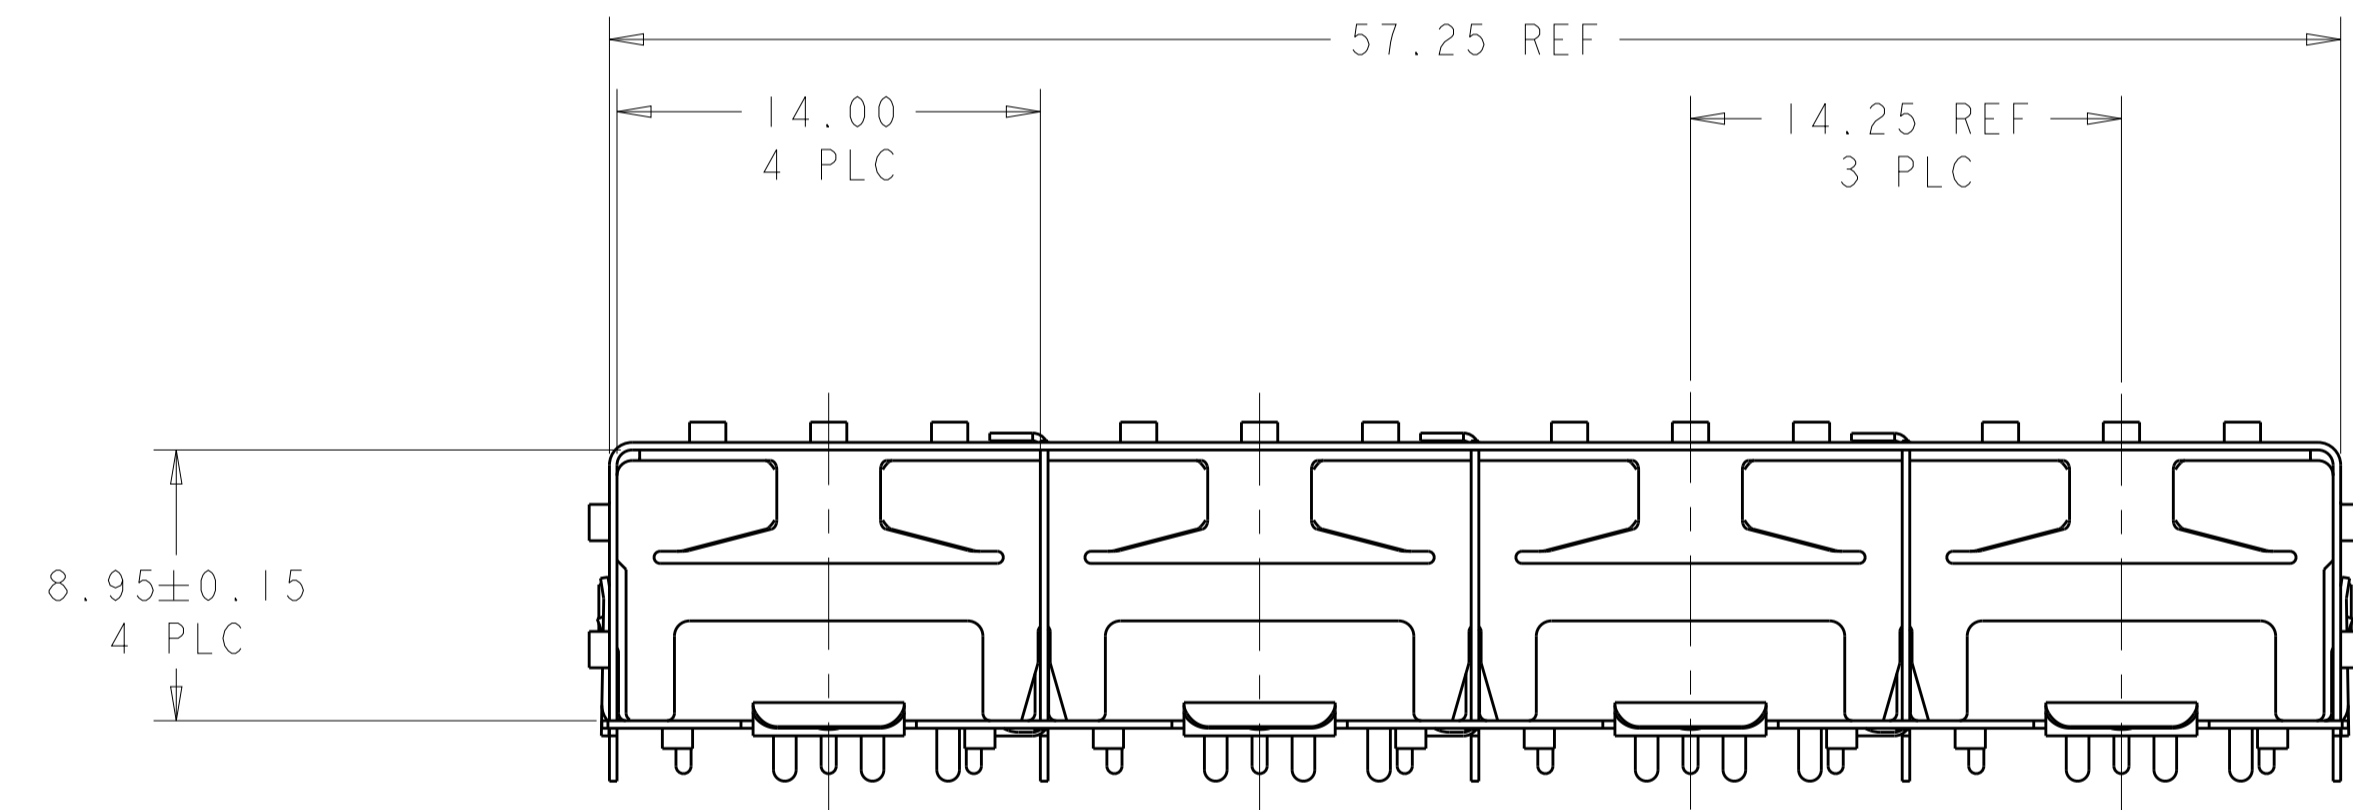
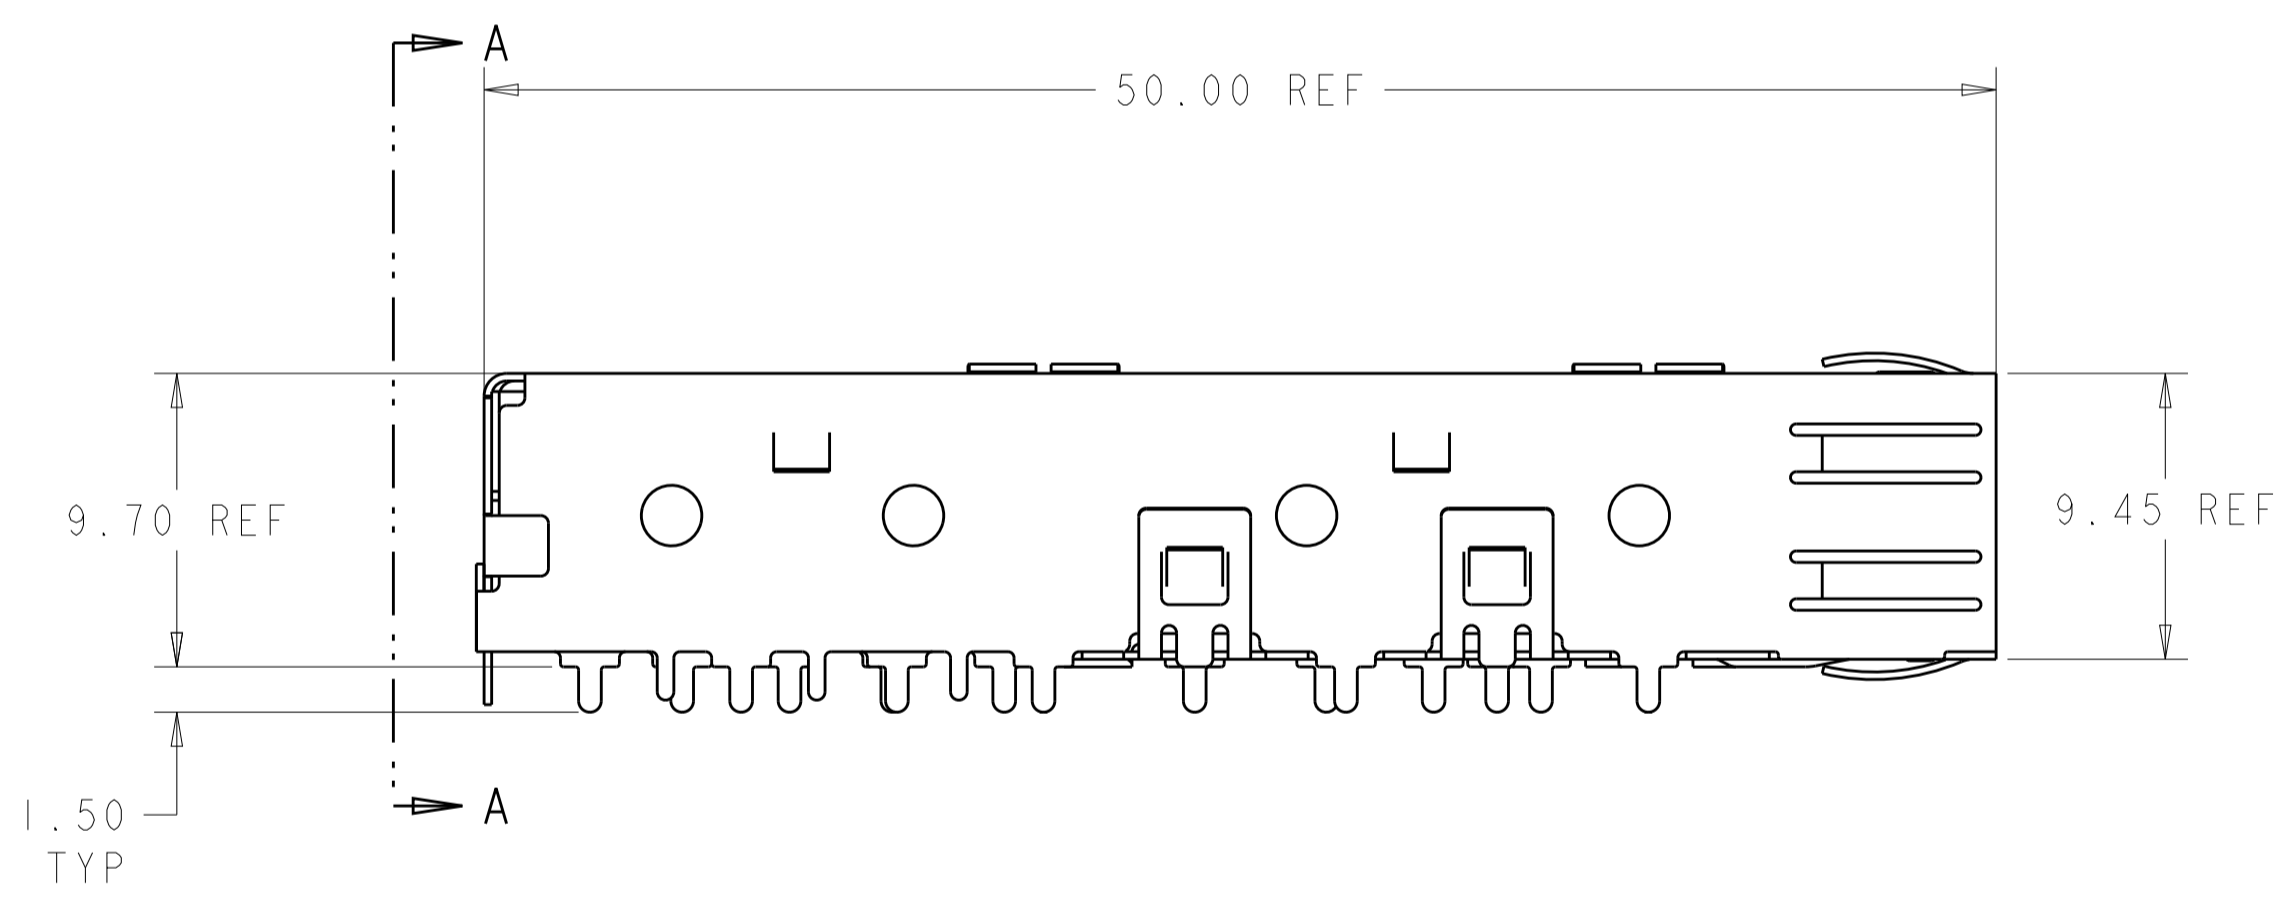
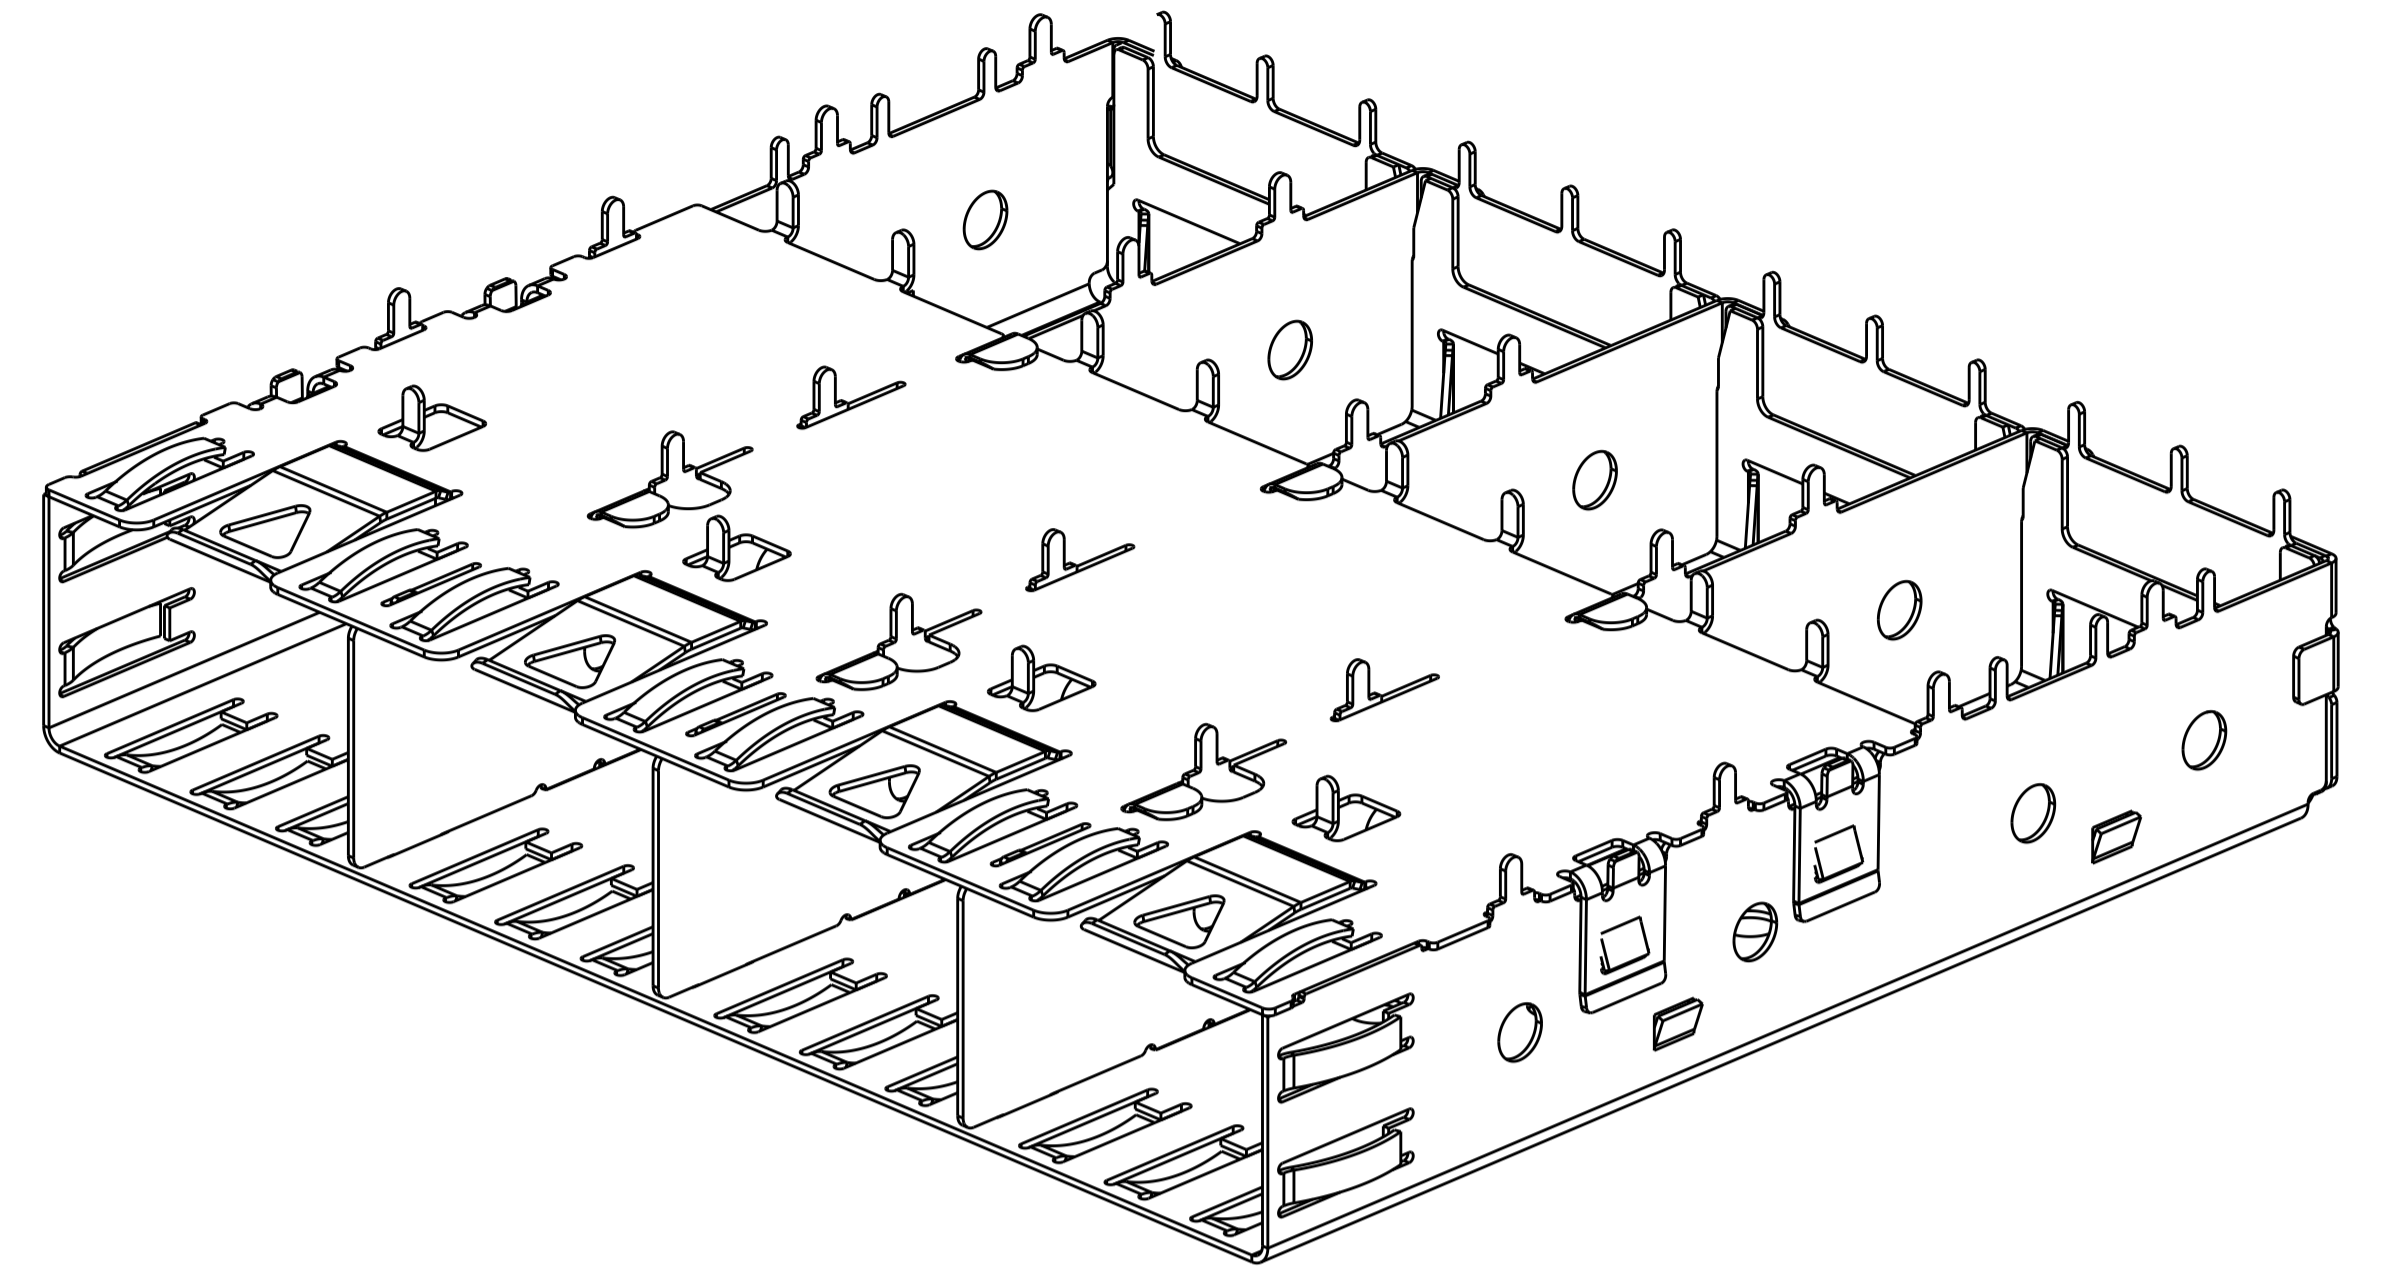


LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD
GP	00				
E2		REVISED PER ECO-14-010419	11JUL2014	JW	SH
F		OBSOLETE PN 1658723-1; ADD PN 1658723-3	05DEC2019	IT	SH
G		ADD PN -4 WITH CUSTOMIZED TRAY	15APR2020	IT	SH
G1		REMOVE NOT TOOLED PN 1658723-3	07MAY2020	IT	SH

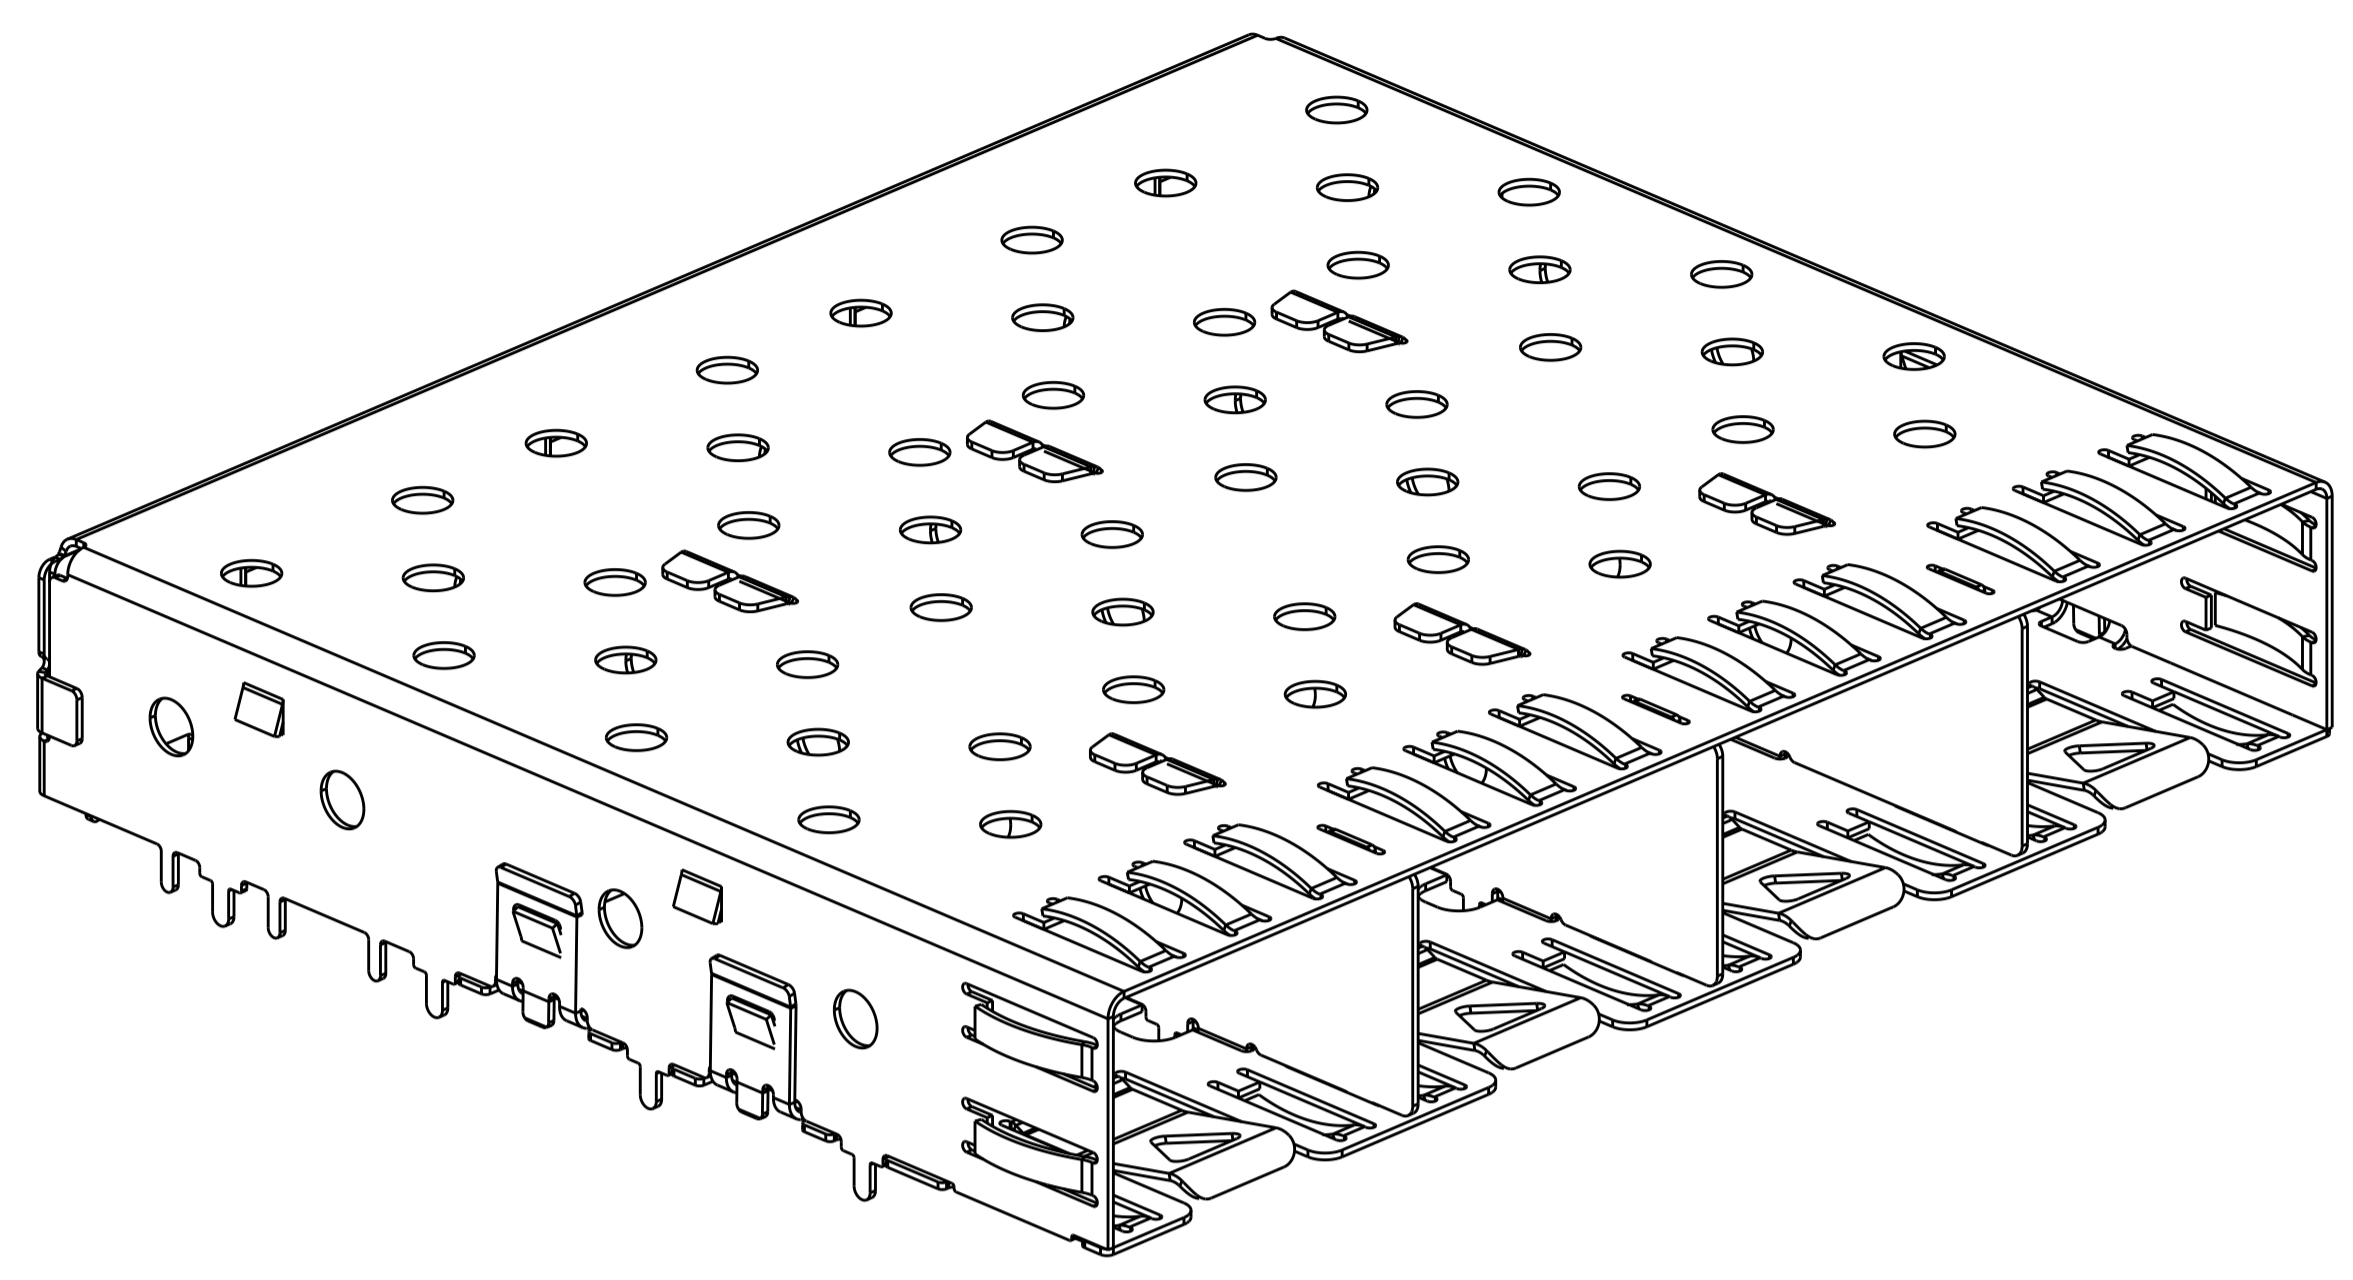

SECTION A-A

- ① MATERIAL: 0.25MM THICK COPPER ALLOY.
- ② FINISH: 1.25µm MINIMUM TIN PER ASTM B 545 OVER NICKEL FLASH PER QQ-N-290. NONPLATED EDGES PERMISSIBLE.
- ③ PADS AND VIAS CHASSIS GROUND.
- ④ DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- ⑤ COMPANY LOGO IN APPROXIMATE AREA SHOWN.
- ⑥ DATE CODE AND PART NUMBER IN APPROXIMATE AREA SHOWN.
- ⑦ MATERIAL: 0.25MM THICK NICKEL SILVER ALLOY,
- ⑧ PACKED WITH CUSTOMIZED TRAY SIZE 340mm X 235mm AND 3X5=15PCS PER TRAY.

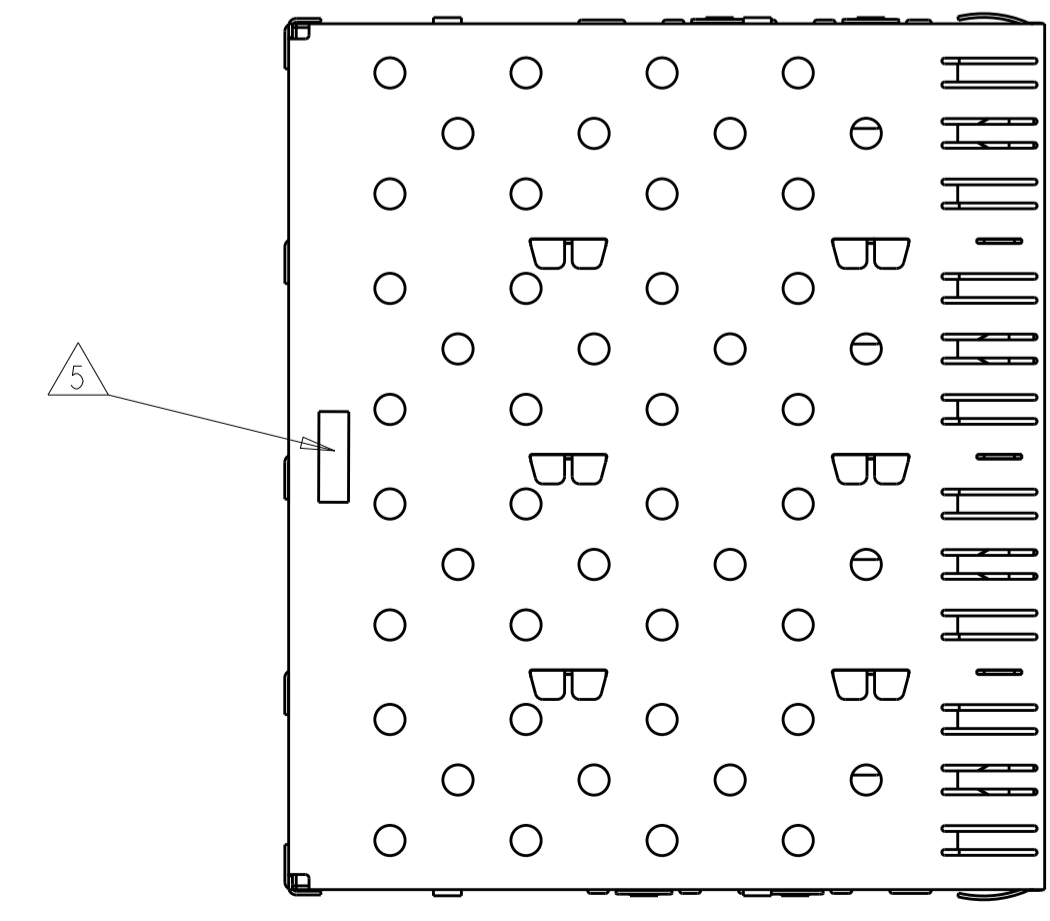

SCALE 2:1

OBSELETE	NO	①	1658723-4
	NO	①	1658723-2
	②	①	1658723-1
	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN	13MAY03
DIMENSIONS:		CHK	06MAY04
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J. KOPPENHEFFER
mm	0 PLC ±	NAME	M. WALMSLEY
	1 PLC ±0.10	PRODUCT SPEC	108-1950
	3 PLC ±	APPLICATION SPEC	114-13017
	4 PLC ±	SIZE	CAGE CODE DRAWING NO
	ANGLES ±	WEIGHT	A100779C=1658723
MATERIAL	FINISH	CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 2 REV G1

