



REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVD
D2		REVISED PER ECO-17-009556	03JULY2017	RS	SW

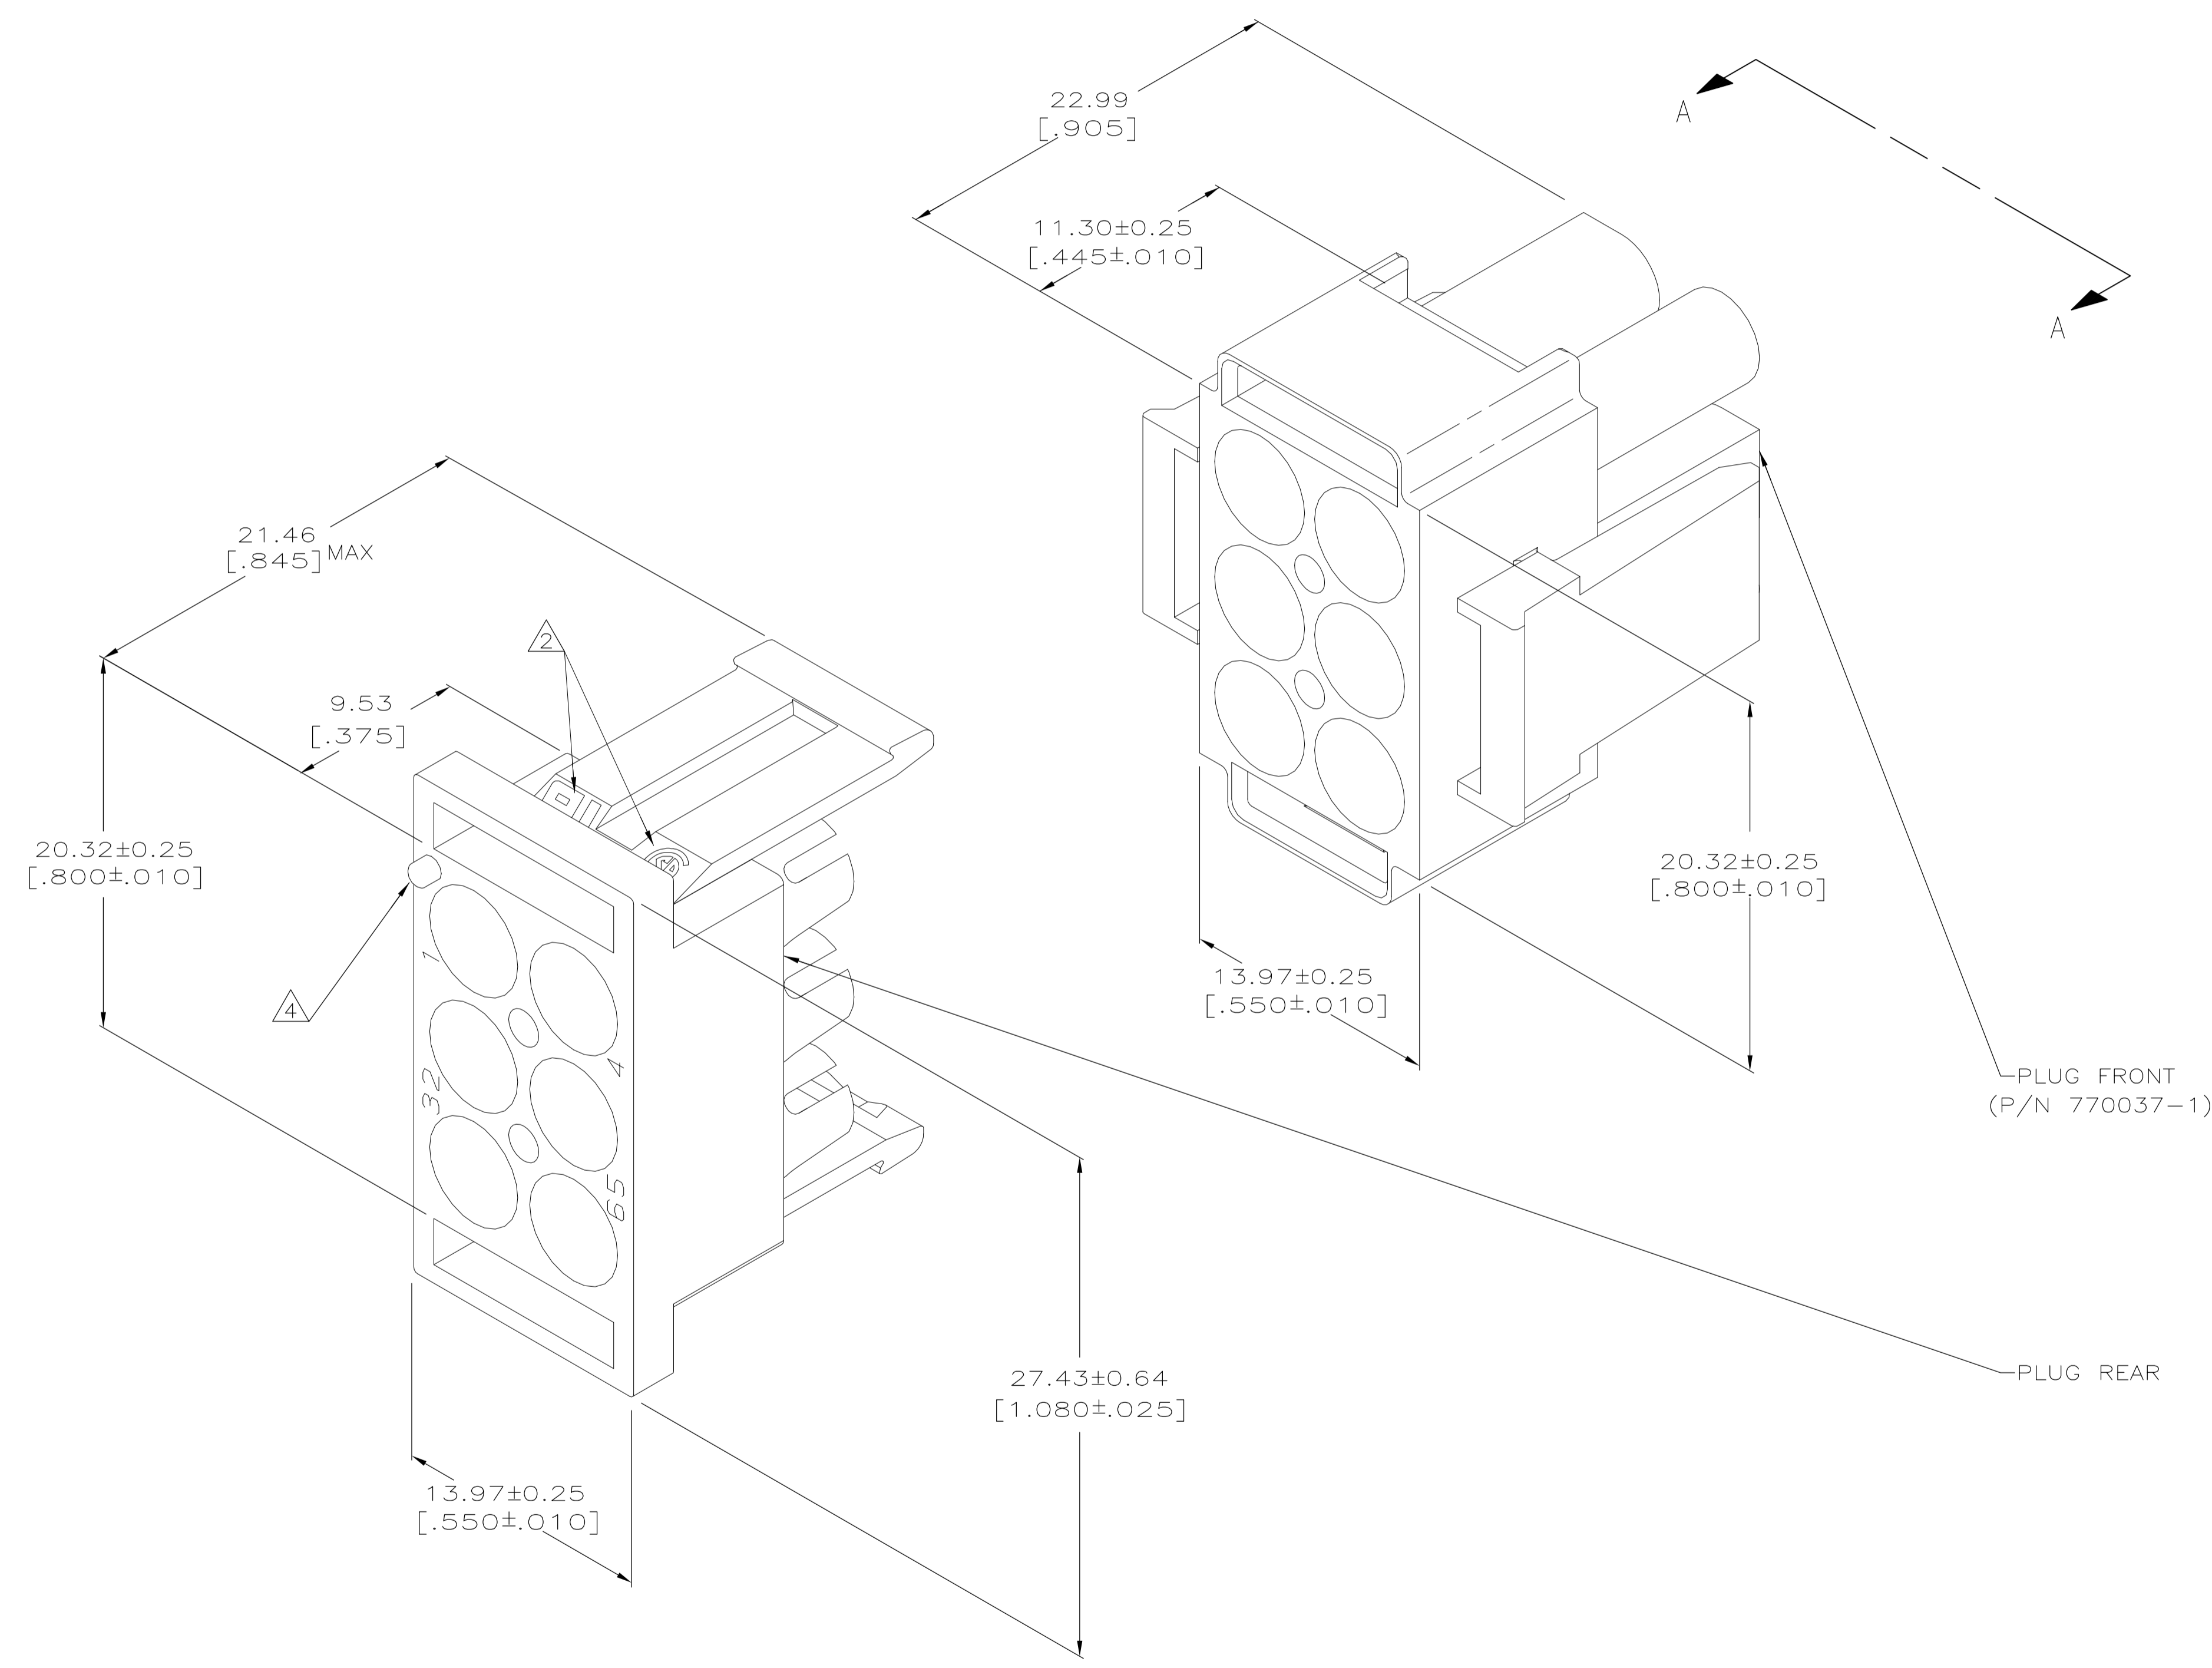

- BULK PACKAGED, UNASSEMBLED.
- APPROVAL AGENCY LOGO LOCATED APPROXIMATELY AS SHOWN.
- AMP LOGO LOCATED THIS SURFACE.
- CIRCUIT NUMBER ONE IDENTIFICATION BUTTON AND CIRCUIT IDENTIFICATION NUMBERS ARE EACH LOCATED ADJACENT TO THE APPROPRIATE CIRCUIT CAVITIES.
- NEW MOLD CONSTRUCTION PROVIDES MATERIAL REDUCTION CORING AT BASE OF SILOS WITH NO CORING AS OPTIONAL.
- DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR

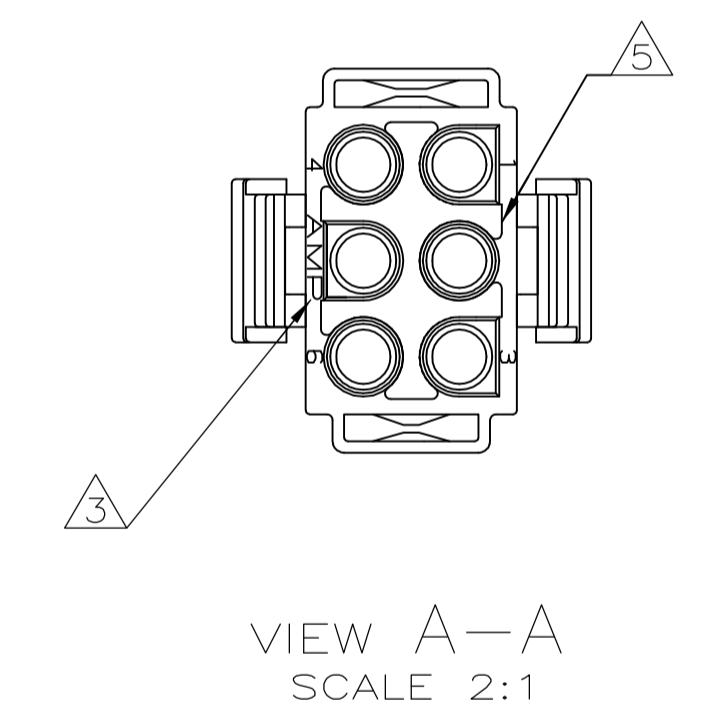

770020-1
PART NUMBER

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN K SALMON 1-22-92	STE TE Connectivity	
DIMENSIONS: INCHES		CHK R SWING 1-22-92	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M TRULL 1-22-92	PRODUCT SPEC	
0. PLC ± -		APPLICATION SPEC		
1. PLC ± -		SIZE CAGE CODE DRAWING NO		
2. PLC ± -		RESTRICTED TO		
3. PLC ± 0.13 [.005]		WEIGHT 0.000000 A1 00779 C=770020		
4. PLC ± -		CUSTOMER DRAWING SCALE 5:1 SHEET 1 OF 1 REV D2		
ANGLES ± -				
MATERIAL NYLON,UL94V-0,	FINISH -			