

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT 2000

ALL RIGHTS RESERVED.

LOC J

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A3	REVISED PER ECO-11-005140	05APR2011	RK	HMR

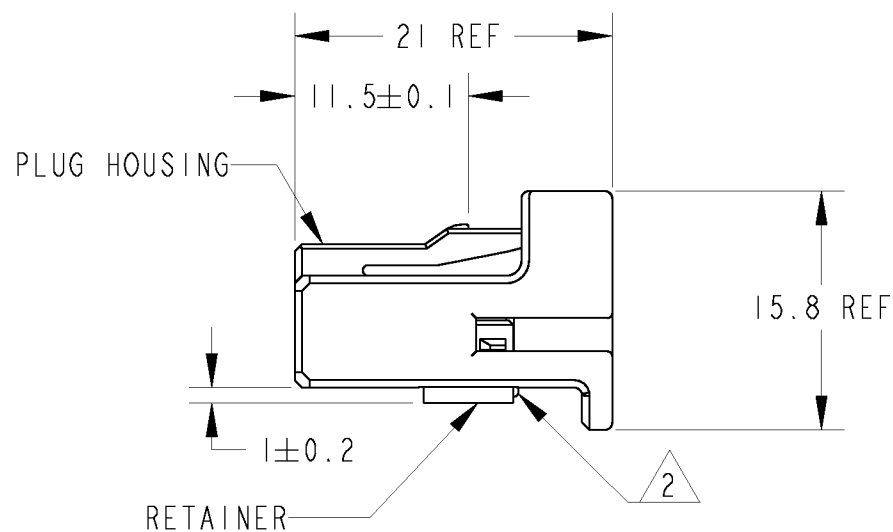
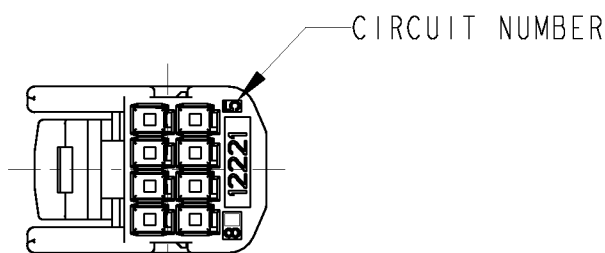
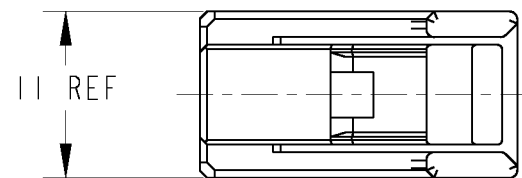
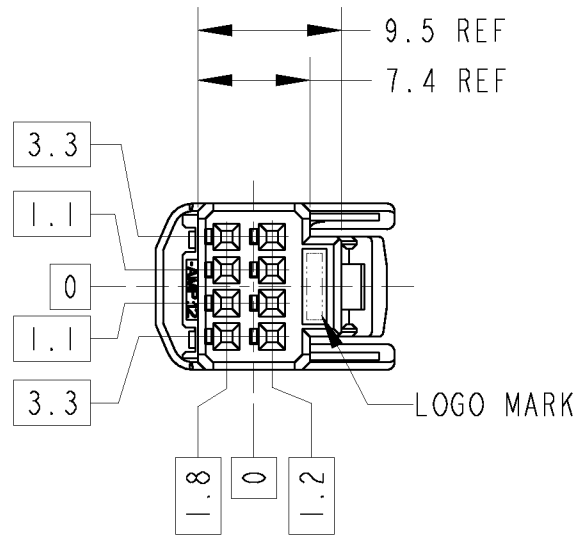


TABLE-1

POS. 極数	CAP ASSEMBLY P/N
8	1376350
	1473793

TABLE-2

	FINISH めっき	TERMINAL P/N 端子型番	APPLICABLE WIRE RANGE 適用電線
SIGNAL 025	TIN	1123343-1	AVSS/AVSSH-f/AESSX 0.3~0.5mm ²
	SELECTIVE GOLD	1123343-2	CAVS/CAVUS 0.22~0.5mm ²

PACKING STYLE 梱包形態	COLOR	PART NUMBER
PAPER BOX ダンボール	BLACK	1376352-2
PLASTIC BAG ビニール袋	NATURAL	1376352-1
OUTER 外装	INNER 内装	

- RETAINER SHOULD BE SET TO THE PRE-ASSEMBLY POSITION WITHIN THE PLUG HOUSING WHEN SHIPPED TO THE CUSTOMER.
- △ THE RETENSION LATCH OF THE PLATE MUST BE OUT SIDE OF PLUG HOUSING WHEN PRE-ASSEMBLY.
- RETAINER RETENSION FORCE FROM HOUSING;30N MIN.
- INSTRUCTION SHEET NO.411-5928
- PART NO. OF CAP HOUSING TO BE MATED ; SEE TABLE-1
- APPLIED TERMINAL ; SEE TABLE-2

- プラグハウジングにリテーナを仮止めして出荷される。
- △ 仮係止時リテーナ突起がハウジングの外側に出ていること。
- リテーナの仮係止保持力は30N MIN.
- 取扱説明書NO. 411-5928
- 嵌合相手ハウジング型番 ; TABLE-1参照
- 適用端子 ; TABLE-2参照

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: ㎜	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 = ± 0.3
	0-PLC ±
	1-PLC ±0.5
	2-PLC ±0.13
	3-PLC ±0.013
	4-PLC ±0.0001
ANGLES ±3°	

MATERIAL PBT FINISH 仕上 NATURAL

DWN N. YASUDA	05JUL00
CHK N. SAI	06JUL00
APVD N. SAI	06JUL00
PRODUCT SPEC 製品規格	108-5668
APPLICATION SPEC 取付適用規格	114-5250
WEIGHT	1.6 g

STE TE Connectivity

NAME 025 SERIES I/O CONNECTOR
名称 8POSITION PLUG HOUSING ASSEMBLY

SIZE A3	CAGE CODE 00779	DRAWING NO C=1376352	RESTRICTED TO
------------	--------------------	-------------------------	---------------

CUSTOMER DRAWING SCALE 2:1 SHEET 1 OF 1 REV A3